


## PRODUCT BRIEF


Intel® Solid State Drive Data Center P3100 Series  
Data Center (DC), PCIe\* (P), 3D NAND



# Intel's First PCIe\*-Based Data Center SSD in the M.2 Form Factor

## Value-based Performance Designed for Data Center Usage

Transform the economics of data center storage with Intel® 3D NAND SSDs.

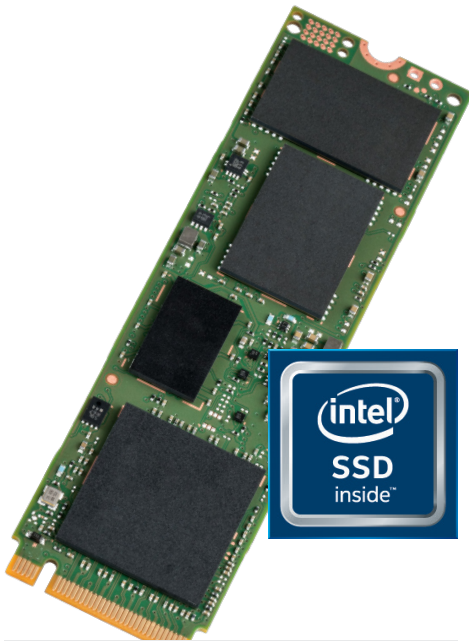

### Intel 3D NAND TLC Technology

The Intel® Solid State Drive DC P3100 Series is Intel's first 3D NAND TLC-based M.2 form factor SSD with the PCIe\* 3.0x4 and NVMe\* interface specifically architected for the data center. It is part of the Intel® 3D NAND SSD family of products. Delivered by a trusted supplier, using proven floating gate design technology, Intel® 3D NAND SSDs push the limits of performance and value to transform the economics of storage.

### Entry PCIe\* Boot Drive

The Intel® SSD DC P3100 Series delivers ideal endurance and performance for read-intensive workloads, and is specifically designed and tested for data center usage models.

The DC P3100 Series is validated for the most common data center environments including boot, search indexing, edge caching, and web hosting.

### Single-Sided for Design Flexibility

All DC P3100 Series capacity points, including 1TB, are single-sided M.2 (22x80 mm) form factor, giving data center designers the flexibility to implement higher-density storage solutions, or to allocate more space for other critical server components.

### Performance that Matters

The DC P3100 Series features impressive sequential read bandwidth of up to 1,800 megabytes per second<sup>1</sup> (MB/s) and sequential writes of up to 175 MB/s.<sup>1</sup> Random read input/output operations (IOPS) of up to 114k<sup>2</sup> support read-intensive usage models, and random writes up to 10k IOPS<sup>2</sup> deliver consistent application performance over a wide range of commonly supported data center workloads.

### Low Power, Lower TCO

With a power draw of only 10 milliwatts (mW), the DC P3100 Series consumes 90% less power than a typical enterprise hard disk drive (HDD) at idle.<sup>3</sup> Average active power of 5.5 watts is up to 50% lower than enterprise HDDs. With this superior power efficiency and the space-saving advantages of the M.2 form factor, data centers can expect to see significant total cost of ownership (TCO) benefits with the DC P3100 Series.

### Quality & Reliability You Can Trust

The DC P3100 Series is backed by Intel's five-year limited warranty, which includes Intel's world-class post sales customer support.

### Product Spotlight

- Designed for boot-specific data center usage models
- Proven Intel quality and reliability
- Designed with integrity
- Single-side M.2 (22x80 mm) form factor
- Low power consumption
- 0.5 Drive Writes Per Day (DWPD)<sup>4</sup>
- Hardware-based AES-256 encryption
- Backed by 5-year Intel warranty

TECHNICAL SPECIFICATIONS<sup>5</sup>

Model Name	Intel® Solid State Drive Data Center P3100 Series			
Capacity (GB)	128, 256, 512, and 1024 (all single-sided)			
NAND Flash Memory	3D Tri-Level Cell (TLC)			
Bandwidth	Sequential Read (up to) <sup>1</sup>	Sequential Write (up to) <sup>1</sup>	Random Read (up to) <sup>2</sup>	Random Write (up to) <sup>2</sup>
	1800 MB/s	175 MB/s	114k IOPS	10k IOPS
Interface	PCIe* 3.0x4, NVMe*			
Form Factor, Height and Weight	<b>Form Factor</b>		<b>Height/Weight</b>	
	Single-sided M.2		Up to 1.5mm / up to 40 grams	
Life Expectancy <sup>6</sup>	1.6 million hours Mean Time Between Failure (MTBF); 0.73% AFR <sup>7</sup>			
Operating Temperature	0°C to 70°C			
RoHS Compliance	Meets the requirements of European Union (EU) RoHS Compliance Directives			

## ENDURANCE

Capacities (GB)	Terabytes Written TBW	JEDEC* Workload (Drive Writes per Day)	
		DWPD (for 3 years) <sup>4</sup>	DWPD (for 5 years) <sup>4</sup>
128	72	0.52	0.31
256	145	0.52	0.31
512	300	0.52	0.31
1024	580	0.52	0.31



For more information, visit [www.intel.com/ssd](http://www.intel.com/ssd)

1. Performance measured with 64 KB transfer size with queue depth 128.
2. Performance measured with 4KB transfer size with queue depth 128.
3. Power measured during Windows\* Idle on system with PCIe ASPM and NVMe low power states.
4. 0.5 DWPD for 3 years, warranted for 5 years with 0.3 DPWD
5. Test and System Configuration: Processor: Intel® Xeon® E5-2699 v3, Speed: 2.30GHz, BIOS: Intel® 2U Release, DRAM: DDR3 – 32GB, OS: Linux\* Centos 7.0, NVMe Driver: Kernel 4.3.3 (native), Intel® SSD DC P3100.
6. All documented endurance test results are obtained in compliance with JESD218 Standards. See [www.jedec.org](http://www.jedec.org) for detailed definitions of JESD218\* Standards.
7. Source – Intel: Figure shown represents Intel's Annual Failure Rate (AFR) goal for Intel® SSD DC P3100 Series.

All information provided here is subject to change without notice. Contact your Intel representative to obtain the latest Intel product specifications and roadmaps.

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software or service activation. Performance varies depending on system configuration. No computer system can be absolutely secure. Check with your system manufacturer or retailer or learn more at [www.intel.com/ssd](http://www.intel.com/ssd).

Intel disclaims all express and implied warranties, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement, as well as any warranty arising from course of performance, course of dealing, or usage in trade.

No license (express or implied, by estoppel or otherwise) to any intellectual property rights is granted by this document.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Tests document performance of components on a particular test, in specific systems. Differences in hardware, software, or configuration will affect actual performance. Consult other sources of information to evaluate performance as you consider your purchase.

Cost reduction scenarios described are intended as examples of how a given Intel-based product, in the specified circumstances and configurations, may affect future costs and provide cost savings. Circumstances will vary. Intel does not guarantee any costs or cost reduction.

Intel, Intel Core, Intel Xeon and the Intel logo are trademarks of Intel Corporation in the U.S. and/or other countries.

\* Other names and brands may be claimed as the property of others.